

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 August 2001 (02.08.2001)

PCT

(10) International Publication Number
WO 01/55774 A2

(51) International Patent Classification⁷: **G02B 27/00**

Charles, L.; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(21) International Application Number: **PCT/US01/02707**

(22) International Filing Date: 26 January 2001 (26.01.2001)

(74) Agents: **HO, Néstor, F.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(25) Filing Language: English

(81) Designated State (*national*): JP.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(30) Priority Data:
60/178,973 26 January 2000 (26.01.2000) US
09/746,933 22 December 2000 (22.12.2000) US

Published:


— without international search report and to be republished upon receipt of that report

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventors: **AASTUEN, David, J., W.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **BRUZZONE,**

(54) Title: REFLECTIVE LCD PROJECTION SYSTEM USING WIDE-ANGLE CARTESIAN POLARIZING BEAM SPLITTER AND COLOR SEPARATION AND RECOMBINATION PRISMS

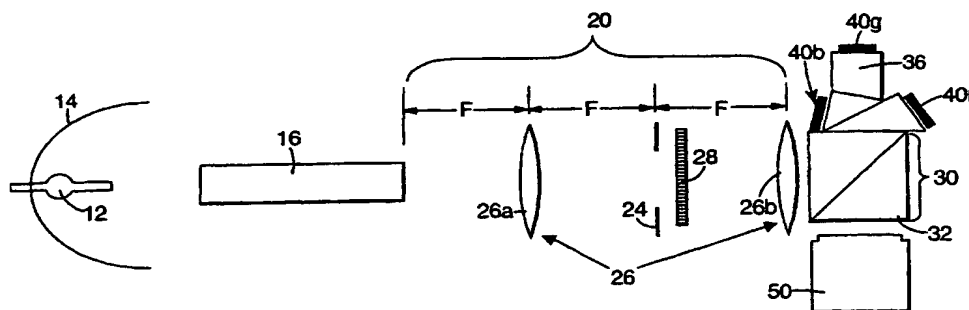

WO 01/55774 A2

(57) Abstract: An optical imaging system including an illumination system, a Cartesian PBS, and a prism assembly. The illumination system provides a beam of light, the illumination system having an $f/\#$ less than or equal to 2.5. The Cartesian polarizing beam-splitter has a first tilt axis, oriented to receive the beam of light. A first polarized beam of light having one polarization direction is folded by the Cartesian polarizing beam splitter and a second polarized beam of light having a second polarization direction is transmitted by the Cartesian polarizing beam splitter. The Cartesian polarizing beam splitter nominally polarizes the beam of light with respect to the Cartesian beam-splitter to yield the first polarized beam in the first polarization direction. The color separation and recombination prism is optically aligned to receive the first polarized beam. The prism has a second tilt axis, a plurality of color separating surfaces, and a plurality of exit surfaces. The second tilt axis may be oriented perpendicularly to the first tilt axis of the Cartesian polarizing beam-splitter so that the polarized beam is nominally polarization rotated into the second polarization direction with respect to the color separating surfaces and a respective beam of colored light exits through each of the exit surfaces. Each imager is placed at one of the exit surface of the color separating and recombining prism to receive one of the respective beams of colored light, wherein each imager can separately modulate the polarization state of the beam of colored light.

BEST AVAILABLE COPY

**REFLECTIVE LCD PROJECTION SYSTEM USING WIDE-ANGLE
CARTESIAN POLARIZING BEAM SPLITTER AND COLOR SEPARATION
AND RECOMBINATION PRISMS**

BACKGROUND OF THE INVENTION

5 This invention relates to the use of 3M Cartesian polarizing beam splitter (PBS) films to make electronic projection systems that use color separation and recombination prisms (e.g. Philips Prisms) with very efficient, low $f/\#$ optical beams while preserving high contrast. More specifically, the present invention relates to an optical imaging system including a reflective imager and a Cartesian wide-angle polarizing beam splitter ("PBS")
10 having a fixed polarization axis and using the tilted reflective surfaces of a Philips prism.

Optical imaging systems may include a transmissive or a reflective imager or light valve. Traditional transmissive light valves allow certain portions of a light beam to pass through the light valve to form an image. By their very function, transmissive light valves are translucent; they allow light to pass through them only where required electrical
15 conductors and circuits are not present. Reflective Liquid Crystal on Silicon (LCOS) imagers, in turn, reflect selected portions of the input beam to form an image. Reflective light valves provide important advantages, as controlling circuitry may be placed below the reflective surface, so that these circuits do not block portions of the light beam as in the transmissive case. In addition, more advanced integrated circuit technology becomes
20 available when the substrate materials are not limited by their opaqueness. New potentially inexpensive and compact liquid color display (LCD) projector configurations may become possible by the use of reflective LC microdisplays. Reflective Liquid Crystal on Silicon (LCOS) imagers in the past have been incorporated into inefficient, bulky and expensive optical systems.

25 For projection systems based on reflective LCD imagers, a folded light path wherein the illuminating beam and projected image share the same physical space between a polarizing beam splitter (PBS) and the imager offers a desirably compact arrangement. A PBS is an optical component that splits incident light rays into a first polarization component and a second polarization component. Traditional PBS's selectively reflect or
30 transmit light depending on whether the light is polarized parallel or perpendicular to the plane of incidence of the light: that is, a plane defined by the incident light ray and a

normal to the polarizing surface. The plane of incidence also is referred to as the reflection plane, defined by the reflected light ray and a normal to the reflecting surface.

Based on the operation of traditional polarizers, light has been described as having two polarization components, a p-component or direction and a s-component or direction.

- 5 The p-component corresponds to light polarized parallel to the plane of incidence. The s-component corresponds to light polarized perpendicular to the plane of incidence. A so-called MacNeille PBS will substantially reflect s polarized light incident on the PBS surface (placed along the diagonal plane connecting two opposing edges of a rectangular glass prism), and substantially transmit p polarized light incident upon this surface.
- 10 Traditional MacNeille PBS technology, is known, and is described in, for example, U.S. Patent No. U.S. 2,403,731; H.A. Macleod, Thin Film Optical Filters, 2nd Edition, McGraw-Hill Publishing Co., 1989; pp. 328-332.

- To achieve the maximum possible efficiency in an optical imaging system, a low $f/\#$ system is desirable (see, F.E. Doany et al., *Projection display throughput; Efficiency of optical transmission and light-source collection*, IBM J. Res. Develop. V42, May/July 1998, pp. 387-398). The $f/\#$ measures the light gathering ability of an optical lens and is defined as:
- 15

$$f/\# = f \text{ (focal length)} \div D \text{ (diameter or clear aperture of the lens)}$$

- The $f/\#$ (or F) measures the size of the cone of light that may be used to illuminate an optical element. The lower the $f/\#$, the faster the lens and the larger the cone of light that may be used with that optical element. A larger cone of light generally translates to higher light throughput. Accordingly, a faster (lower $f/\#$) illumination system requires a PBS able to accept light rays having a wider range of incident angles.
- 20

- The maximum incident angle θ_{\max} (the outer rays of the cone of light) may be mathematically derived from the $f/\#$, F:
- 25

$$\theta_{\max} = \tan^{-1} ((2F)^{-1})$$

Traditional folded light path optical imaging systems have employed the previously described optical element known as a MacNeille PBS. MacNeille PBS's take advantage of the fact that an angle exists, called Brewster's angle, at which no p-polarized

light is reflected from an interface between two media of differing index. Brewster's angle is given by:

$$\theta_B = \tan^{-1}(n_1/n_0),$$

where n_0 is the index of one medium, and n_1 is the index of the other. When the angle of incidence of an incident light ray reaches the Brewster angle, the reflected beam portion is polarized in the plane perpendicular to the plane of incidence. The transmitted beam portion becomes preferentially (but not completely) polarized in the plane parallel to the plane of incidence. In order to achieve efficient reflection of s-polarized light, a MacNeille polarizer is constructed from multiple layers of thin films of materials meeting the Brewster angle condition for the desired angle. The film thicknesses are chosen such that the film layer pairs form a quarter wave stack.

There is an advantage to this construction in that the Brewster angle condition is not dependent on wavelength (except for dispersion in the materials). However, MacNeille PBS's have difficulty achieving wide-angle performance due to the fact that the Brewster angle condition for a pair of materials is strictly met at only one angle of incidence. As the angle of incidence deviates from this angle a spectrally non-uniform leak develops. This leak becomes especially severe as the angle of incidence on the film stack becomes more normal than the Brewster's angle. As will be explained below, there are also contrast disadvantages for a folded light path projector associated with the use of p and s-polarization, referenced to the plane of reflection for each ray.

Typically, MacNeille PBS's are contained in glass cubes, wherein a PBS thin-film stack is applied along a diagonal plane of the cube. By suitably selecting the index of the glass in the cube, the PBS may be constructed so that light incident normal to the face of the cube is incident at the Brewster angle of the PBS.

MacNeille-type PBSs reportedly have been developed capable of discrimination between s- and p-polarized light at $f/\#$'s as low as $f/2.5$, while providing extinction levels in excess of 100:1 between incident beams of pure s or pure p polarization. Unfortunately, as explained below, when MacNeille-type PBSs are used in a folded light path with reflective imagers, the contrast is degraded due to depolarization of rays of light having a reflection plane rotated relative to the reflection plane of the central ray. As used below, the term "depolarization" is meant to describe the deviation of the polarization state of a

light ray from that of the central light ray. As light in a projection system generally is projected as a cone, most of the rays of light are not perfectly parallel to the central light ray. The depolarization increases as the $f/\#$ decreases, and is magnified in subsequent reflections from color selective films. This "depolarization cascade" has been calculated by some optical imaging system designers to effectively limit the $f/\#$ of MacNeille PBS based projectors to about 3.3, thereby limiting the light throughput efficiency of these systems. See, A.E. Rosenbluth et al., *Contrast properties of reflective liquid crystal light valves in projection displays*, IBM J. Res. Develop. V42, May/July 1998, pp. 359-386, (hereinafter "*Rosenbluth Contrast Properties*") relevant portions of which are hereby incorporated by reference.

Recently, Minnesota Mining and Manufacturing has developed a novel type of birefringent polymeric multi-layer polarizing film ("3M advanced polarizing film" or "APF"). Co-assigned and co-pending parent application U. S. Patent Application Serial No. 09/312,917, describes the use of such a film as a polarizing beam splitter. European Patent Application EP 0 837 351 A2 attempts to utilize another 3M dual brightness enhancing film (DBEF), an early 3M multi-layer film material, in a projection display apparatus having a "wide angle" reflecting polarizer. Such reference refers to p and s differentiation and uses the 3M material as a common reflective polarizer. Moreover, while "wide-angle" performance is a widely recognized design goal, references to "wide-angle" are meaningless absent contrast limits and spectral leak reduction and teachings on how to achieve such a goal. The 3M product "DBEF" is a reflective polarizer with typical block direction leakages of 4 to 6 percent at normal incidence. At higher angles the leakage is somewhat reduced, but at 45 degrees the extinction is typically still a few percent. Contrast ratios when using DBEF typically will be limited to maximum values at or below 99:1 for white light. However, DBEF suffers from spectral leaks that reduce the contrast of certain color bands to as low as 25:1, depending on the nature of the illumination source and the exact DBEF sample. To obtain superior performance it is desirable that good screen uniformity and the absence of spectral leaks in the dark state accompany good average contrast in all relevant color bands.

There has been previous work with non-telecentric configuration, reported by Paul M. Alt in the *Conference Record of the 1997 International Display Research Conference* (p. M 19 - 28) and in the *IBM Journal of Research and Development* (Vol. 42, pp. 315 -

320, 1998). These systems, however, used conventional MacNeille PBS cubes rather than a Cartesian PBS, and achieved a contrast ratio of only 40:1 at $f/5$. The PBS and the color prism were used in an s-orientation.

The need remains for an optical imaging system that includes truly wide angle, fast optical components and that may allow viewing or display of high-contrast images. Furthermore, it is desirable to enable optical designs that minimize the size of individual components, such as the color separation prism.

A color separation prism receives the polarized beam of light and splits the beam, generally into three-color components. Color prisms and imagers naturally have an orientation, including a long axis and a short axis. Optical designers are presently constrained to one of two options. The first is to place the imager on the color prism such that the long axis of the imager is parallel to the long axis of the color prism exit aperture (to the imagers). This allows the use of the smallest possible color prism, but under this condition, if the tilt axes of the PBS and the color prism are kept parallel to each other, then the designer is constrained to build the projector in a tower configuration. Such a configuration places the longest dimension of the projector in a vertical orientation, which may be unsuitable for a variety of applications. The second option is to place the long axis of the imager along the short direction of the color prism exit aperture (to the imagers). This allows the use of more desirable low-profile projector configurations, wherein the longest dimension of the projector is horizontal. However, this requires that the color prism be made larger and therefore that the projection lens have a longer back focal length. Consequently, this configuration will require larger, heavier, and more expensive projection lens and color prism components.

SUMMARY OF THE INVENTION

The present invention describes an optical imaging system including and advantageously employing a wide-angle "Cartesian" polarizer beam splitter ("PBS") and a Philips prism for separating and recombining separate color bands. The optical imaging system of the present invention is capable for use with "fast" (low $f/\#$) optical beams while providing a high contrast ratio. The term optical imaging system is meant to

include front and rear projection systems, projection displays, head-mounted displays, virtual viewers, head up displays, optical computing, optical correlation and other similar optical viewing and display systems. A Cartesian PBS is defined as a PBS in which the polarization of separate beams is referenced to invariant, generally orthogonal principal axes of the PBS. In contrast with a MacNeille PBS, in a Cartesian PBS the polarization of the separate beams is substantially independent of the angle of incidence of the beams. The use of a Cartesian PBS film also allows the development of systems using curved PBS that provide higher light output and/or replace or augment other optical components.

A wide-angle PBS is defined as a PBS capable of receiving a cone of light rays with an angle of incidence up to 11° (in air) or more, while maintaining acceptable system contrast. By recognizing and advantageously applying properties of wide-angle Cartesian polarizers, the present invention discloses a high-efficiency optical imaging system capable of functioning at $f/\#$'s equal to or below $f/2.5$ while maintaining a contrast ratio of at least 100 to 1, or, more preferably, 150 to 1 in a projection system configuration.

An embodiment of an optical imaging system in accordance with the present invention includes a wide-angle Cartesian polarizing beam splitter, light valve illumination optics having an $f/\# \leq 2.5$, a color separation and recombination prism and at least two reflective light valves. The Cartesian polarizing beam splitter (PBS) has a structural orientation defining fixed polarization axes. A reflective Cartesian PBS substantially reflects those components of a beam of light that are polarized along one such fixed axis, called the Material Axis. Those components of a beam of light with polarization not along the Material Axis are substantially transmitted. The polarizing beam splitter therefore splits incident light into a first and a second substantially polarized beam having polarization states referenced to the fixed polarization axes and the polarizing beam splitter directs the first polarized beam onto the reflective light valve. In an exemplary embodiment, the Cartesian PBS includes 3M advanced film. In other exemplary embodiments, the PBS may include a wire grid polarizer, such as those described in Schnabel et al., "Study on Polarizing Visible Light by Subwavelength-Period Metal-Stripe Gratings", Optical Engineering 38(2), pp. 220-226, February 1999, relevant portions of which are hereby included by reference. Other suitable Cartesian polarizers also may be employed.

The light valve illumination optics have an $f/\#$ of at most 2.5, a minimum cone angle of about 11 degrees (in air) and the system has a contrast ratio exceeding 100 to 1 using an ideal imager. In preferred embodiments, the contrast ratio exceeds 150 to 1 and the illumination optics have an $f/\#$ equal or less than 2.2. The illumination optics are those optics that condition (e.g., prepolarize, shape, homogenize and filter) the light beam. The $f/\#$ is associated with the beam of light incident on the imager.

The light valves or imagers may be a polarization modulating light valve, including smectic or nematic liquid crystal light valves. The optical imaging system may further comprise a pre-polarizer that polarizes input light into pre-polarized light, the pre-polarized light comprising the incident light on the polarizing beam splitter. The optical imaging system also includes a color separation and recombination prism assembly or mirrors and a plurality of reflective light valves (i.e., imagers). The prism assembly has a second tilt axis, a plurality of color separating surfaces, and a plurality of exit surfaces. The prism receives the polarized light from the polarizing beam splitter, separates the polarized light into a plurality of colors and directs polarized color beams to each light valve. The optical imaging system may include a suitable light source that supplies the incident light.

In alternative embodiments, the reflective light valve may reflect at least a portion of the first polarized beam back to the original polarizing beam splitter or to a second PBS.

As stated above, a color prism exit aperture (to the imagers) has an orientation, including a long axis and a short axis. If an optical designer places the imager on the color prism such that the long axis of the imager is parallel to the long axis of the color prism exit aperture, then the designer will achieve the smallest and lightest projector configuration. However, under this condition, because traditionally the tilt axes of the PBS and the color prism are constrained to be parallel to each other, then the designer is constrained to build a tower configuration. Alternatively, a larger color prism can be made to accommodate the imager oriented perpendicularly to the configuration discussed above, but such an orientation has the disadvantages of increasing the size, weight, and cost of the color prism. It also results in a longer back focal length for the projection lens, adding to the complexity, size and expense of this lens. The use of a Cartesian PBS was found to enable the rotation of the color prism such that the tilt axis for the color separating coatings are orthogonal to the tilt axis of the PBS. This allows the user the

option to build either a tower of a flat configuration without weight, size, or cost penalty.

It is highly desirable that the prism be capable of orientation with the tilt axes of its color separation surfaces either parallel to that of the PBS's polarization separation surface or perpendicular to it, as the designer desires. This allows the system designer to have maximum flexibility with regard to industrial design, cooling, imager placement and other practical projection system considerations. The combination of the Cartesian PBS and the color prisms can, at low $f/\#$, enable the color prism and PBS to have crossed tilt axes and obtain good contrast. This allows a flat, low profile orientation with minimized CP size, which is particularly desirable for portable front projection systems. The present work details specific types of color prism to be used, as well as prism orientation to achieve desirable results.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1A and 1B are schematic plan views of two embodiments of projection systems in accordance with the present invention.

Figures 2A and 2B are side perspective views of a first and a second PBS and color prism assembly oriented with parallel and perpendicular tilt axes in accordance with the present invention.

Figure 3 is a graph of APF Cartesian PBS contrast performance vs. wavelength of light.

Figure 4 is a graph of APF Cartesian PBS contrast performance vs. $f/\#$.

Figures 5a and 5b are graphs of the contrast and dark and bright state spectral radiance vs. wavelength for PBS and color prism with parallel tilt axes.

Figure 6 is a pupil image of a dark state Maltese band for a parallel, s-oriented PBS and color prism.

Figure 7 is a pupil image of a dark state Maltese band for APF PBS without color prism.

Figure 8a is a graph of contrast vs. wavelength for PBS and color prism with crossed tilt axes.

Figure 8b is a graph of dark and bright state spectral radiance for PBS and color prism with crossed tilt axes.

Figure 9 is a dark state pupil image of Maltese band for perpendicular tilt axes.

5 DETAILED DESCRIPTION OF THE INVENTION

Figure 1A and 1B are schematic plan views of projection systems in accordance with the present invention. Figure 1A illustrates an $f/2$ test system according to the present invention having a PBS and color prism assembly oriented with parallel tilt axes. Figure 1B illustrates an $f/2$ test system according to the present invention having a PBS and color prism assembly oriented with perpendicular or orthogonal tilt axes. Referring to 10 Figs. 1 and 2, the following reference numerals are used in the description.

Parts list:

15	12	Arc lamp	38v	"Vertical" dimension of CP
	14	Elliptical reflector	38h	"Horizontal" dimension of CP
	16	Tunnel integrator	40b	Blue imager
	20	Telecentric illumination system	40g	Green imager
	24	Telecentric stop	30 40r	Red imager
20	26a, 26b	Telecentric lenses	50	Projection lens
	28	Pre-polarizer	56	PBS tilt axis
	30	Polarization beam splitter (PBS)	58	CP tilt axes
	32	Cartesian PBS film	60	Illumination optic axis
	36	Philips color prism assembly	35 62	Optic axis through CP
25	38	Color prism exit aperture		

The tilt axes of the PBS and color separation prisms are shown as parallel in this embodiment. The long dimension of the color prism exit aperture is out of the page.

The present invention analyzes and recognizes a "depolarization cascade" problem 40 that limits the $f/\#$ of the illumination optics of traditional optical imaging systems using a PBS based on discrimination between p and s polarization states. Most reflective LCD imagers are polarization rotating; that is, polarized light is either transmitted with its

polarization state substantially unmodified for the darkest state, or with a degree of polarization rotation imparted to provide a desired gray scale. A 90° rotation provides the brightest state in these PBS-based systems. Accordingly, a polarized beam of light generally is used as the input beam for reflective LCD imagers. Use of a polarizing beam splitter (PBS) offers attractive design alternatives for both polarizing the input beam and folding the light path.

The exemplary system illustrated by Figure 1 differs in some ways from a commercial projector (e.g. there is no provision for converting nominally p-polarized light from the lamp into the desired s-polarization state to improve efficiency), but it does provide a flexible test system which allows easy modification of the f/# of the illuminating beam of light. In the system of Figure 1, light is emitted from a metal halide or high pressure mercury arc lamp, 12, and collected by elliptical reflector, 14. The converging beam of light from the lamp and reflector is inserted into a glass tunnel beam integrator, 16, which reflects the beam multiple times inside itself by total internal reflection. This results in a more uniform beam intensity being emitted at the down-stream end of the tunnel integrator than was inserted at the upstream end. The tunnel integrator should preferably have the same cross-sectional dimensions as the optically active pixel area of the imagers (40b, 40g, and 40r) to be illuminated.

After being emitted from the tunnel integrator, the light is collected by the first telecentric lens 26a of the telecentric illumination system, 20. This lens is located one focal distance from the emitting end of the tunnel integrator, 16, and transmits the light through the telecentric stop, 24, and onto the second telecentric lens, 26b. Between the telecentric stop, 24, and the second telecentric lens, 26b, we have placed a polarizer to polarize the light perpendicularly to the plane of Figure 1. This is referred to as “vertical” or “nominally s” polarized. The polarizer, 28, could be placed at a number of places in the system, but the light intensity is lower near the telecentric stop, 24, than at other convenient places in the system. Placement of the polarizer, 28, either directly before or after this stop therefore ensures maximum polarizer lifetime.

The resulting vertically polarized, telecentric beam then passes into the Cartesian PBS, 30, in which the Cartesian PBS film is oriented to substantially reflect vertically polarized light. It is to be understood that the term “film” is not limiting, and could refer to, for example, the array of elements in a wire grid polarizer, or the 3M APF multilayer

optical film polarizer. The light therefore passes into the color prism assembly, 36, where it is separated into distinct red, green, and blue beams that illuminate the red, green and blue imagers (40r, 40g, and 40b) respectively. For purposes of clarity, the color prism assembly, 36, is shown in the conventional orientation with the tilt axes of the red and blue reflective coatings parallel to the tilt axis of the Cartesian PBS film, 32. While this orientation is necessary for the prior art using MacNeille PBSs, it will be shown below that the employment of a Cartesian PBS film, 32, allows the rotation of the color prism assembly 36 by 90 degrees about the principal axis of the beam, so that the red and blue imagers in the figure would be oriented vertically with respect to one another in the figure, and the nominally s polarized light from the PBS 30 would be p polarized with respect to the color selective surfaces of the Color Prism Assembly 36.

This is further illustrated in Figures 2a and 2b. Figure 2a shows an arrangement in which the tilt axes 58 of the Color Prism Assembly 36 are parallel to the tilt axis 56 of the PBS 30. Figure 2b shows the arrangement made possible by a Cartesian PBS 30 in which the tilt axes 58 of the Color Prism Assembly 36, are perpendicular to the tilt axis 56 of the PBS 30.

It should also be noted that the Color Prism Assembly employed in Figure 1 may be configured so that all color light beams, including the green light beam, are reflected onto the imagers. That is, the green light beam is reflected along with the red and blue beam, rather than having the green light pass undeflected on to the green imager. Also, an alternative embodiment may be arranged such that either the red or blue beam would pass undeflected onto its intended imager.

Each imager, 40r, 40g, and 40b, is divided into many separate and independent picture elements (pixels), each of which can be individually addressed to rotate the polarization state of the incident light as it is reflected off each pixel. If a pixel element for a particular color channel is intended to be dark, then no polarization rotation occurs at that pixel on the appropriate imager, and the light is reflected back out through the Color Prism Assembly 36 and into the PBS 30. The light reaching the Cartesian PBS film 32 from this color pixel element is then still vertically polarized, and therefore reflected by the Cartesian PBS Film 32, back through the telecentric system and into the lamp. Substantially none of this light will propagate into the projection lens assembly 50 and therefore substantially none will be projected onto the screen (not shown). If a pixel

element for a particular color channel is intended to be bright, then polarization rotation occurs at that pixel on the appropriate imager, and the light is reflected back out through the color prism assembly, 36, and into the PBS, 30. The light reaching the Cartesian PBS film 32 from this color pixel element is then at least partially horizontally polarized, and therefore partially substantially transmitted by the Cartesian PBS Film 32 into the projection lens, and subsequently imaged onto the screen (not shown).

The degree of horizontal polarization imparted to the light reflected from each color pixel element will depend on the level of brightness desired from the particular color pixel at the time. The closer the rotation of the polarization approaches a pure horizontal polarization state at any given time, the higher the resulting screen brightness for that particular color pixel element at that particular time.

The present work details specific types of color prism 36 to be used, as well as color prism 36 orientation to achieve desirable results. It is highly desirable that the color prism 36 be capable of orientation with its tilt axes either parallel to that of the PBS 30 or perpendicular to it, as the designer desires. This allows the system designer to have maximum flexibility with regard to industrial design, cooling, imager placement and other practical projection system considerations. For example, the decision as to whether to make a tower configuration (where the shortest dimension of the projector is held horizontal in use) or a more conventional flat configuration (where the shortest dimension is held vertical in use) with the most compact possible color prism assembly would not be an option open to the designer in the absence of the aforementioned flexibility. The alternatives open to a designer using the configuration of figure 1 have in the past been: a) design using the most compact possible color prism to accommodate the selected imager, but place the prism in a "tower" configuration, or b) design a larger color prism capable of accommodating the long, horizontal axis of the imager within the shorter dimension of the color prism face. In the second case the projector may be oriented in a flat configuration, but it will be larger and heavier than the alternate tower configuration. The former option may be undesirable for commercial and thermal reasons, while the latter is undesirable due to the premium placed on small size and weight in the marketplace. Because a Cartesian PBS prepares a sufficiently pure polarization state at usefully low $f/\#$, the color prism 36 may be rotated 90° about the optic axis 62 when the Cartesian PBS is employed. This enables the usage of a smaller color prism 36 for the horizontal projector layout.

Examples

A 3M APF type Cartesian polarizer film was used as a polarization splitting surface, which allows the PBS film to be placed in a glass cube, similarly to a MacNeille PBS. An advantage of the APF type PBS is that, unlike the MacNeille PBS, it may be used with glass of any index. This allows flexibility for selecting glasses with different properties that may be desirable for different applications. Examples include low blue light absorption where color gamut and balance is important, or low stress optic coefficient for high light intensity applications, or higher index of refraction for smaller angular spread in the glass, allowing smaller components where compact design is important. Secondly, because tilted color separation coatings such as those used in color prisms are sensitive to angle, a fully telecentric beam was used for these experiments. This beam provides a full $f/2$ cone at all points on the imager, thereby ensuring that all allowable rays of light in an $f/2$ beam are represented at all image locations in our tests. The system has been designed for maximum flexibility, for example to allow easy changes of illumination $f/\#$.

The PBS 30 in figure 1 is illuminated with light polarized into and out of the page (vertically), so it is nominally an s-polarized beam with respect to the PBS. The vertical direction will be referred to in future as the y direction, and the direction of light propagation will be referred to as the z direction. The color prism 36 depicted is a so-called Philips Prism. However, the detailed results are expected to be independent of the precise color prism configuration.

The y polarized light incident on the PBS from the lamp 12 is reflected by the PBS into the color prism. The color prism is shown with its reflecting planes for red and blue light rotated about an axis parallel to that about which the PBS is rotated (parallel to the y axis). The configuration shown will be referred to as an "s-oriented" color prism.

The other case to be considered is that where the color prism is rotated by 90 degrees about the direction of propagation of the central ray of light through the color prism. In this case the inclined color reflecting surfaces are rotated about an axis perpendicular to that of the PBS rotation axis, which will be referred to as a "p-oriented" color prism.

Wide-angle, high-extinction MacNeille PBS and color prism systems are offered for sale, but are generally designed only to work at $f/2.8$ and higher. Experimental results

using such a MacNeille PBS at $f/2$ with no color prism and with simulated perfect imagers, yielded only 80:1 contrast. In the present exemplary experimental setup, the simulated perfect imager consisted of a first surface mirror simulating a dark state and a quarter wave film (QWF) laminated to mirror and rotated so that its optic axis was 45 degrees to the incident polarization simulating the bright state. It therefore seems unlikely that contrast at acceptable levels (exceeding 250:1 for perfect imagers, so that system contrast with actual imagers will be adequate) could be possible once the color prism is inserted.

However, the Cartesian PBS and color prism of the present invention are specifically designed to be used together in a system. The design assumes that the PBS and the color prism are oriented to have their reflective planes rotated about parallel axes. In general, it was found that known previous systems had been designed with the PBS and the color prism having parallel tilt axes for their reflecting surfaces. Such an arrangement appears to have been chosen because the rays that have highest contrast are those propagate within the plane defined by the normal to the reflecting surface and the optical axis (i.e. the reflection plane of the central ray), whether for a PBS or for a color selective surface. Thus, for conventional components with narrow bands of high contrast situated near the reflection plane of the central ray (the so-called Maltese bands) perpendicular tilt axes results in a very small region of high contrast, defined by the overlap of the high contrast band of the PBS and the perpendicular high contrast band of the color prism. The amount of light contained in this very small region of angle space is inadequate to provide acceptable contrast at usefully small $f/\#$'s, and so this configuration is has never been selected by designers using conventional components.

For the Cartesian PBS, it was found that the band of high contrast for rays reflected from the PBS surface is so broad and the inherent contrast is so good that contrast degradation due to crossing of the tilt axes of the PBS and the color prism is very small. Indeed, in some cases it is not apparent from the data that there is any inherent degradation in contrast, though it was initially expected for such degradation to be easily noticeable. The performance of the components and system will be demonstrated through the examples below.

Example 1: Performance of APF Cartesian PBS with no color Prism.

Data was first taken to establish the baseline performance of the APF PBS, the mirror simulation of an imager in its dark state, and the mirror with quarter wave film simulation of an imager in its bright state, along with the overall contrast capability of the system of figure 1 (without a color prism). The resulting data is shown in figures 3 and 4 for two different samples of APF Cartesian PBS. The data indicates a very high level of contrast even *vis-a-vis* the earlier reported performance of plate-type Cartesian PBS systems. Figure 3 shows the results as a function of wavelength of light at $f/2$, while figure 4 indicates results as a function of $f/\#$. In both cases, the PBS film was contained in a cubic prism made of BK7 glass. In figure 4 the data was taken both with and without an optional clean-up polarizer just before the projection lens, to remove stray light due to a slight haze in the PBS prism. The optional polarizer is not present for the data in figure 3. These contrast levels indicate that the optical system itself, including the PBS but not the color prism, has a dark state which presents less than 0.1% of the light present in the bright state.

Example 2: Performance of APF Cartesian PBS and color prism with parallel tilt axes.

If the color prism is added to the system, but the imagers continue to be simulated by mirrors and quarter wave films as before, then the effects of the depolarization cascade may be assessed. To evaluate these effects, the color prism was designed to work optimally with light that is perfectly y polarized. The color prism was designed for use at $f/\#$'s down to 2.8, with the PBS and the color prism having parallel tilt axes. Versions of the color prism made of BK7 and of SK5 glass have been used in this work, but the present example focuses on the BK7 glass prism, which has an index of refraction matching that used in the design work. It is important to note, that the color prism was designed to work with perfectly y polarized light, such as that presented by a Cartesian polarizer. It was specifically not designed to compensate the polarization impurities introduced by a MacNeille PBS. (Designing the color prism to ameliorate the angle dependent phase and rotation of the polarization state of the light introduced by the MacNeille polarizer will degrade the performance of a system using a Cartesian PBS. Similarly, a color separation and recombination prism designed to work well with a

Cartesian PBS will perform poorly with a MacNeille PBS). Accordingly, the use of a Cartesian PBS simplifies color prism design by removing the necessity for such compensation.

Figure 5a shows the results of placing the color prism and APF PBS in the system of figure 1 with parallel tilt axes. In taking data for this figure a "notch filter" has been used to block light from the low contrast yellow and cyan regions. (These spectral regions have low contrast due to the effects of band edges in the color separating coatings on the phase of light near the band edges). Figure 5b shows the dark and light state irradiance in the same arbitrary units. The photopic contrast ratio is 389:1.

Figure 6 shows the Maltese band of the dark state for the system configuration of figure 5, and figure 7 shows (for comparison) the same Maltese band for the APF with no color prism. For parallel tilt axes, the Maltese band of the color prism overlays and is parallel to that of the PBS. This reduces the width of the resulting Maltese band, resulting in a decrease in the contrast ratio between the configuration used in figures 3 and 4 without a color prism, and that used for figure 5 with a color prism.

The degradation of contrast outside the relatively narrow region around the reflection plane of the central ray may be attributed to the color prism. This is evident from figure 7, which shows the equivalent pupil image when the color prism is removed. The digital camera used for these images automatically re-scales the brightness of the image, so direct comparisons between the two figures is not possible. However, the contrast ratio for the configuration of figure 7 is about six times that for figure 6, meaning that this dark state pupil image is six times darker than figure 6.

Example 3: Performance of APF Cartesian PBS and color prism with perpendicular tilt axes.

Because the Maltese band for the PBS itself is so deep and broad, we expect that there may be a minimal degradation in contrast resulting from the crossing of the Maltese band due to the color prism with that due to the PBS. In this case, rather than figuratively overlaying the narrow horizontal Maltese band of the color prism over the broad horizontal Maltese band of the PBS, a vertical Maltese band is overlayed due to the color prism cross-wise over the broad horizontal Maltese band of the PBS. Due to the extremely broad nature of the Maltese band of the APF PBS (the pupil image contains rays

with polar angles out to about 14°) the degradation in contrast resulting from this crossing of bands is small. This is quite different from the case for conventional MacNeille PBS components.

Figure 8 demonstrates the performance obtained when the color prism is rotated so that s-polarized light from the PBS became p-polarized relative to the inclined surfaces of the color prism. It is clear that the contrast is somewhat lower than in figure 5, but the reduction is quite small, only about 15% (301:1 vs. 360:1). In addition, because a high pressure Hg lamp was used, and because these lamps present a non-uniform, peaked spectral intensity function (as can be seen in figures 5b and 8b) the photopic contrast is quite sensitive to the precise wavelengths at which the color prism coatings provide the best contrast.

The peaked nature of the spectral intensity function of the lamp makes final system performance very sensitive to small variations in the spectral contrast performance of the color prism. It is therefore essential to refine the color prism design to ensure that peak spectral contrast wavelength remains at the spectral peaks of lamp intensity after rotating the prism tilt axes so that they are not parallel to that of the PBS. Figure 9 depicts the Maltese band for the perpendicular tilt axes configuration. In keeping with the minimal contrast ratio differences seen between figures 5 and 8, this image looks much like that of figure 6, rotated by 90° .

CLAIMS

What is claimed is:

1. An optical imaging system comprising:

- 5 a) an illumination system (20) providing a beam of light, the illumination system having an $f/\#$ less than or equal to 2.5;
- b) a Cartesian polarizing beam-splitter (30) having a first tilt axis, oriented to receive the beam of light, wherein the Cartesian polarizing beam splitter nominally polarizes the beam of light with respect to the Cartesian beam-splitter, wherein a first polarized beam of light having a first polarization direction is folded by the Cartesian polarizing beam splitter and a second polarized beam of light having a second polarization direction is transmitted by the Cartesian polarizing beam splitter;
- 10 c) a color separation and recombination prism (36) optically aligned to receive one of the polarized beams of light, said prism having a second tilt axis, a plurality of color separating surfaces, and a plurality of exit surfaces, wherein the second tilt axis is oriented perpendicularly to the first tilt axis of the Cartesian polarizing beam-splitter so that the polarized beam is nominally polarization rotated into the opposite polarization direction with respect to the color separating surfaces and a respective beam of colored light exits through each of the exit surfaces; and
- 15 d) a plurality of polarization modulating imagers (40), each imager placed at one of the exit surface of the color separating and recombining prism to receive one of the respective beams of colored light, wherein each imager can separately modulate the polarization state of the beam of colored light incident on said imagers.
- 20

2. The optical imaging system of claim 1, wherein the first polarization direction is s-polarization and the second polarization direction is p-polarization.

25

3. The optical imaging system of claim 1, wherein the first polarization direction is p-polarization and the second polarization direction is s-polarization.

4. The optical imaging system of claim 1, wherein the illumination system provides a beam of substantially pre-polarized light.

30 5. The optical imaging system of claim 1, wherein the color separation and recombination prism includes at least three exit surfaces, and the plurality of imagers

includes at least three imagers, wherein each of the colored light beams is a different color and each imager receives one of the different color light beams.

6. The optical imaging system of claim 1, wherein each imager reflects a polarization modulated image, wherein each image enters the color separation and recombination prism and the prism recombines the images into a single combined image, wherein the combined image is transmitted by the Cartesian polarizing beam splitter.

7. The optical imaging system of claim 6, further comprising a projection lens assembly (50), wherein the combined image is projected by the lens assembly onto a surface for viewing.

8. The optical imaging system of claim 1, wherein the optical system is a front projection system.

9. The optical imaging system of claim 1, wherein the optical system is a rear projection system.

10. The optical imaging system of claim 1, wherein the color separation and recombination prism includes a Phillips prism.

11. The optical imaging system of claim 1, wherein the Cartesian polarizing beam splitter includes APF multilayer optical film.

12. The optical imaging system of claim 1, wherein the polarization modulating imagers include a LCOS imager.

13. A projection system comprising:

- a) a Cartesian polarizing beam splitter, the Cartesian polarizing beam splitter defining a first tilt axis;
- b) a color separation prism assembly, the prism assembly having a second tilt axis;
- c) wherein the Cartesian polarizing beam splitter and the prism assembly are arranged such that the first and the second tilt axes are perpendicular to each other.

14. The projection system of claim 13, further comprising an illumination system providing a beam of light, the illumination system having an $f/\#$ less than or equal to 2.5.

15. The projection system of claim 13, wherein the projection system is a front projection system.

16. The projection system of claim 13, wherein the system is a rear projection system.

17. The projection system of claim 13, wherein the color separation prism assembly includes a Phillips prism.
18. The projection system of claim 13, wherein the Cartesian polarizing beam splitter includes APF multilayer optical film.
- 5 19. A projection engine for displaying an image, the projection engine comprising:
- a) a Cartesian polarizing beam-splitter having invariant, generally orthogonal principal axes including a first tilt axis; wherein the Cartesian polarizing beam splitter reflects a first polarization component beam of an incident beam of light and transmits a second polarization component beam, the polarization of the
 - 10 separate component beams being referenced to the principal axes; and
 - b) a color separating prism assembly, optically aligned to receive one of the polarization component beams, the prism assembly having a plurality of color separating surfaces having tilt axes.
20. The projection engine of claim 19, wherein the tilt axes of its color separation surfaces
- 15 are parallel to the first tilt axis of the Cartesian polarizing beam splitter.
21. The projection engine of claim 19, wherein the tilt axes of its color separation surfaces are perpendicular to the first tilt axis of the Cartesian polarizing beam splitter.
22. The projection engine of claim 19, further comprising an illumination system providing the incident beam of light, the illumination system having an f/# of at most
- 20 2.5.
23. The projection engine of claim 19, further comprising a plurality of imagers, wherein the prism assembly has a plurality of exit surfaces and each imager is optically aligned with respect to a corresponding exit surface.
24. The projection engine of claim 23,
- 25 a) further comprising a projection lens assembly;
 - b) wherein each imager is a polarization modulating reflective imager and the prism assembly is a color separating and recombining prism assembly;
 - c) wherein the prism assembly receives the one polarization component beam and separates the polarization component beam into a plurality of color beams;
 - 30 d) wherein each color beam exits through a respective exit surface and a portion of the color beam is polarization modulated and reflected by the respective imager;

- e) wherein the reflected portions of the color beams reenters the prism assembly and are recombined into a single image beam, the image beam being directed by the Cartesian polarizing beam splitter to the projection lens assembly, wherein the projection lens assembly projects an image.

1/12

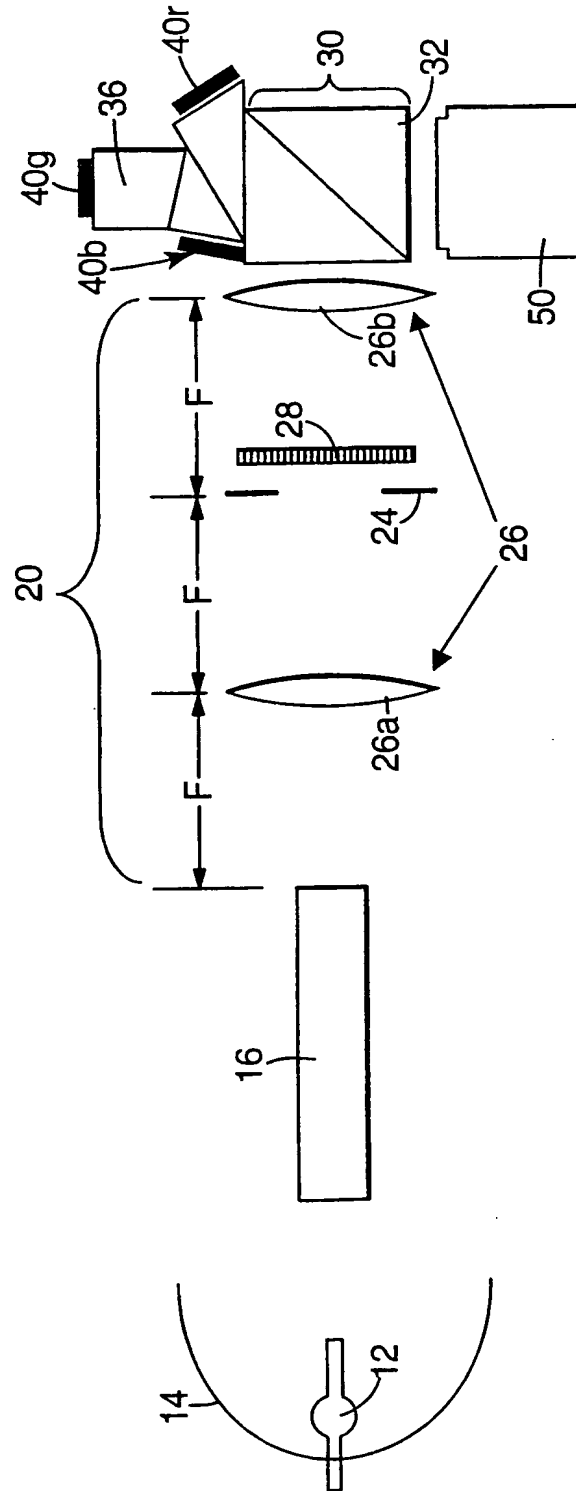


Fig. 1a

2/12

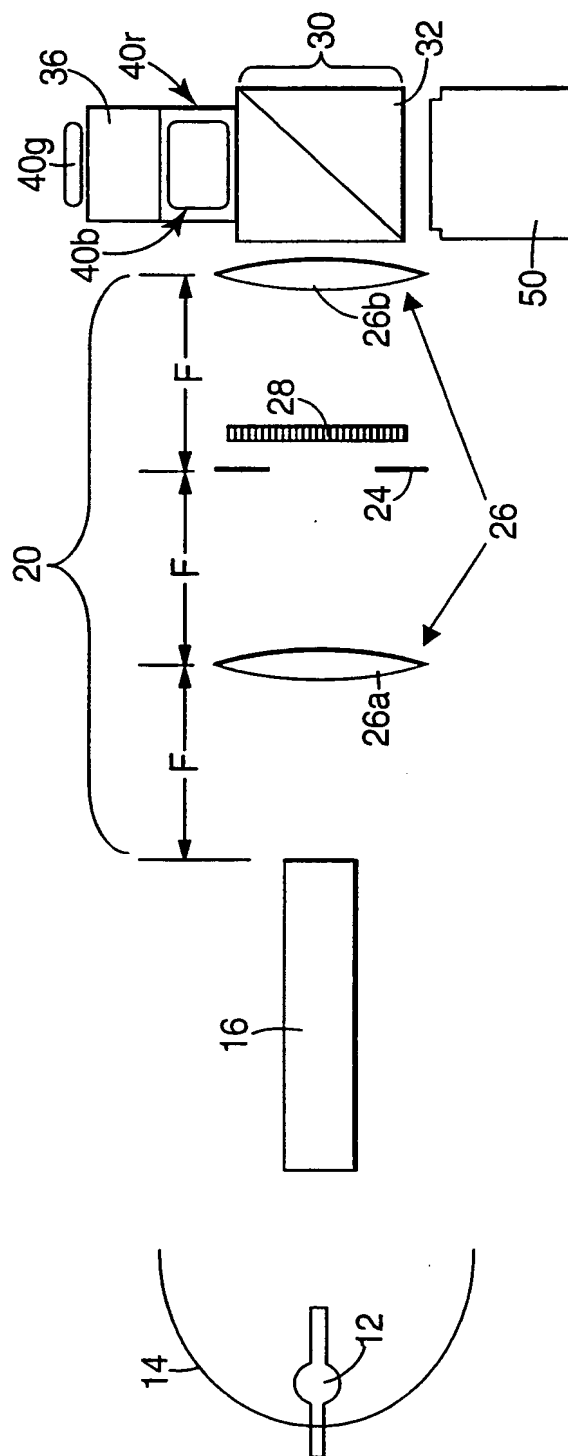
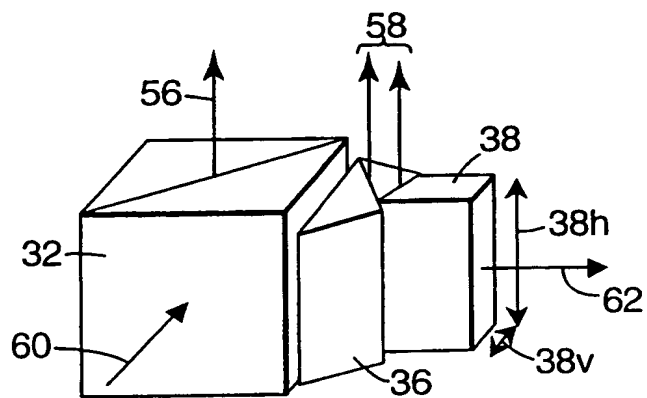
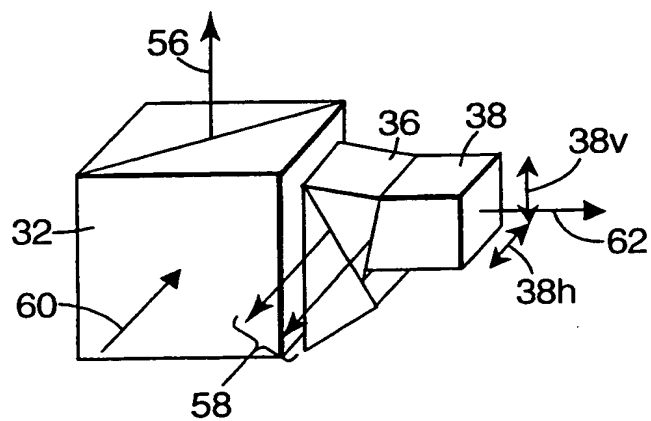
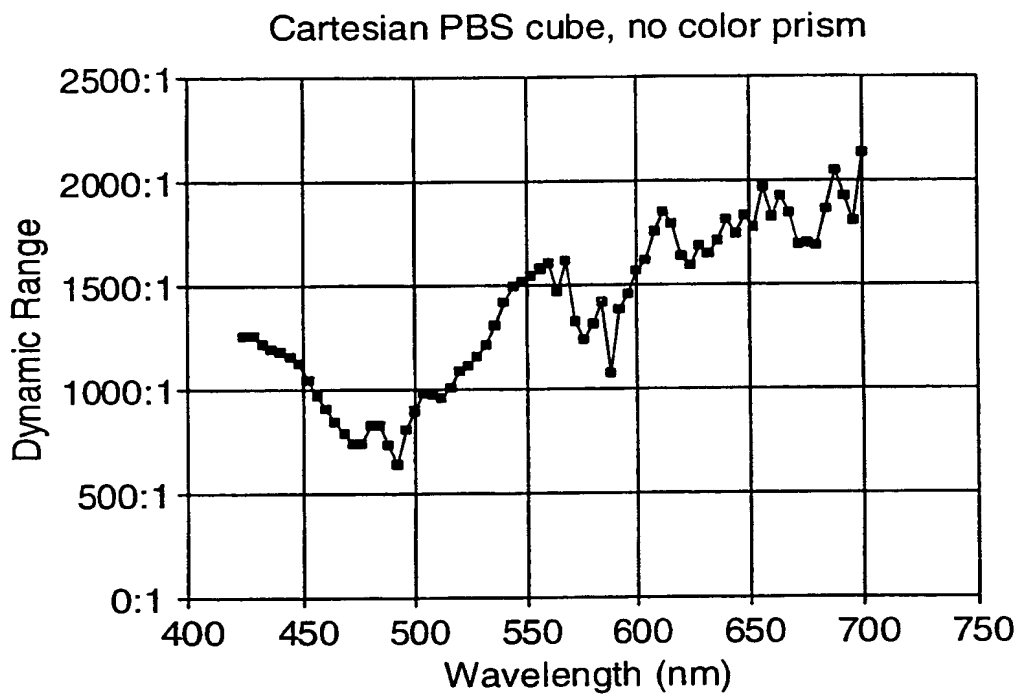


Fig. 1b

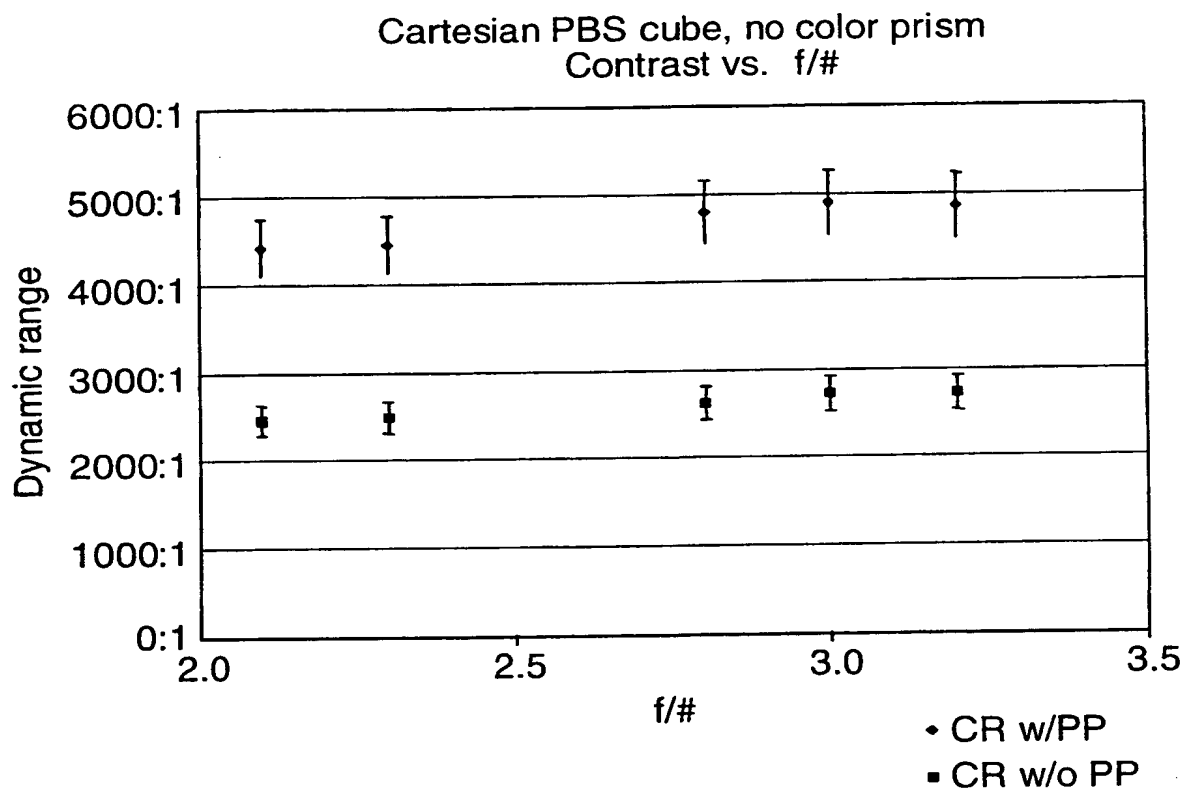
3/12

**Fig. 2a****Fig. 2b**

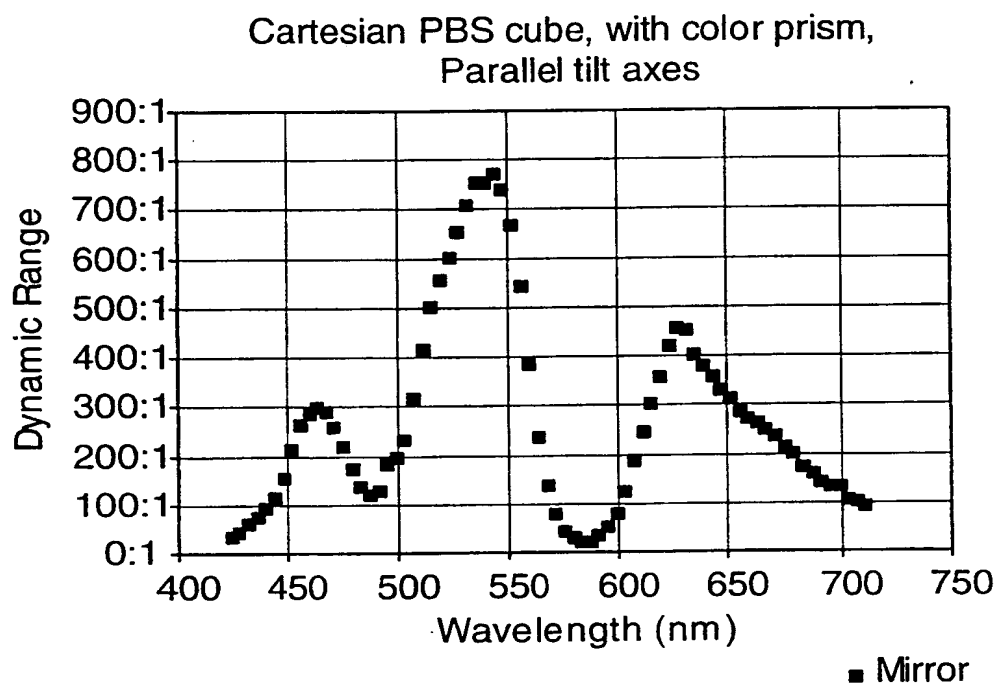
4/12

**Fig. 3**

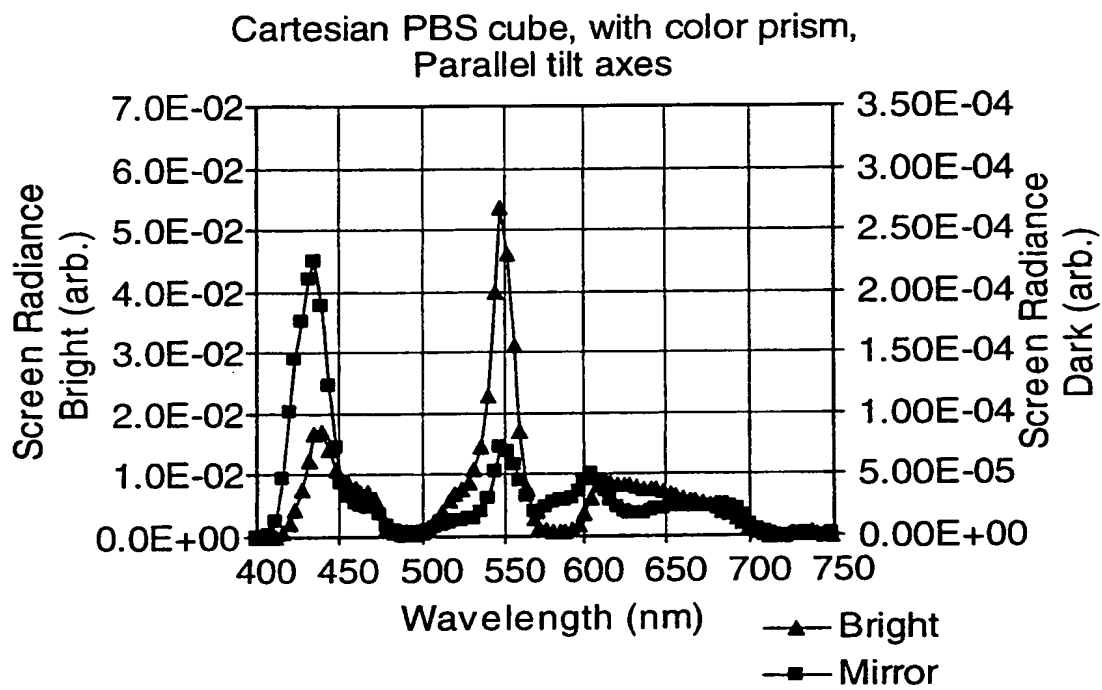
5/12

**Fig. 4**

6/12

**Fig. 5a**

7/12

**Fig. 5b**

8/12

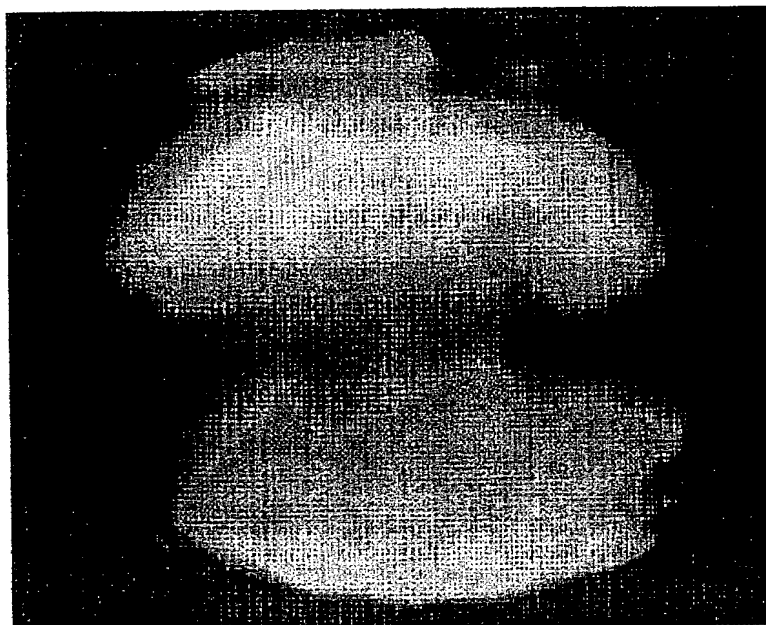


Fig. 6

9/12

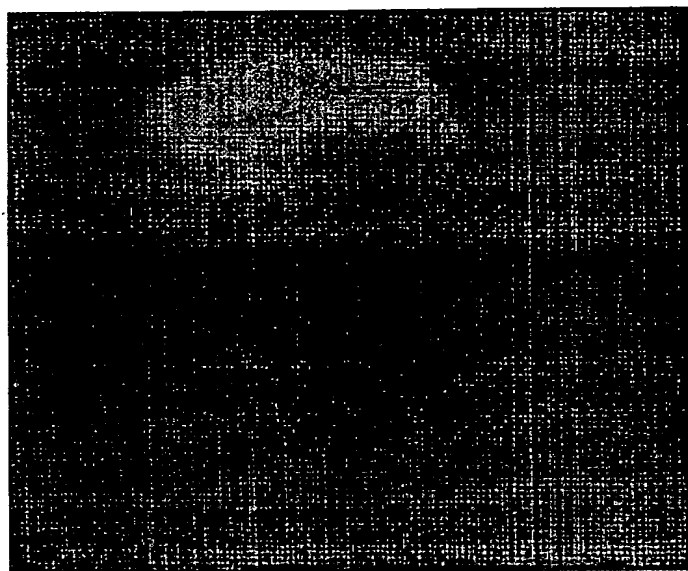
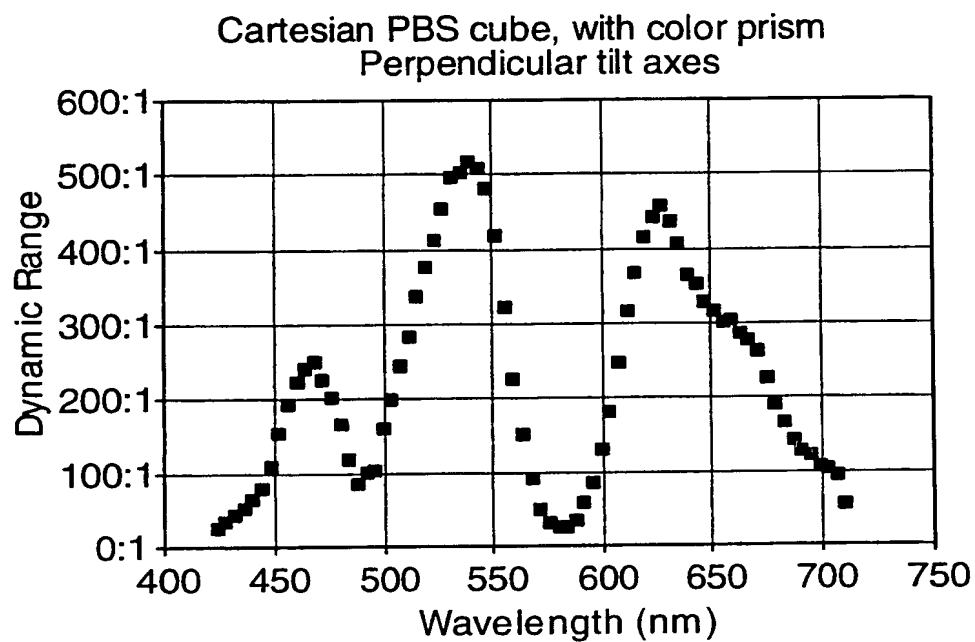
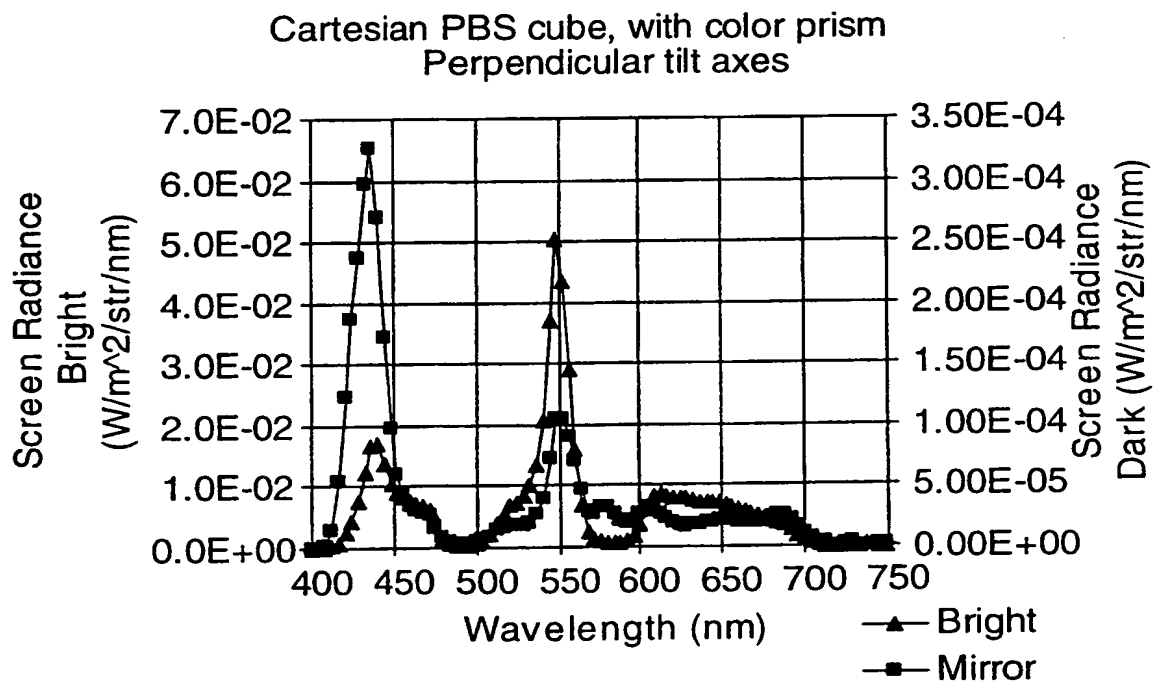


Fig. 7

10/12

**Fig. 8a**

11/12

**Fig. 8b**

12/12

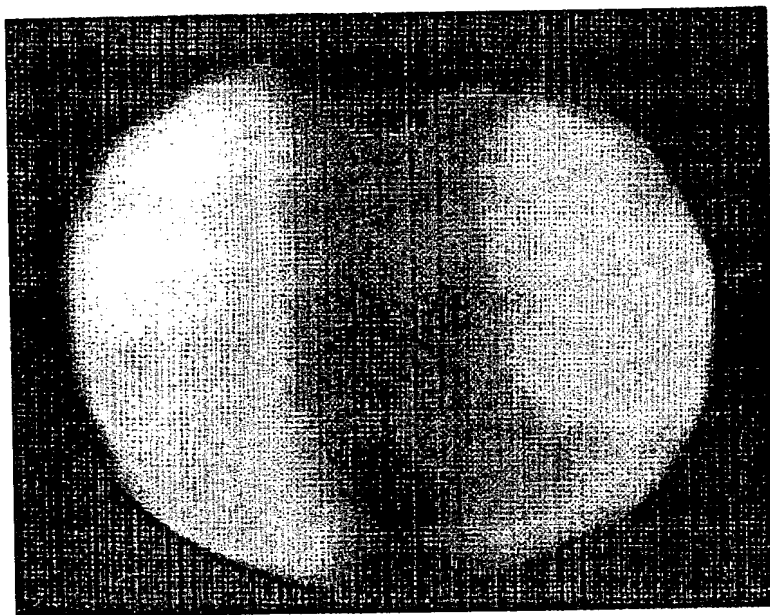


Fig. 9

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 August 2001 (02.08.2001)

PCT


(10) International Publication Number
WO 01/55774 A3

- (51) International Patent Classification⁷: **H04N 9/31** Charles, L.; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (21) International Application Number: **PCT/US01/02707**
- (22) International Filing Date: 26 January 2001 (26.01.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/178,973 26 January 2000 (26.01.2000) US
09/746,933 22 December 2000 (22.12.2000) US
- (71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (74) Agents: **BRADY, Arthur J.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (81) Designated State (*national*): JP.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published:
— with international search report
- (88) Date of publication of the international search report:
10 January 2002

(72) Inventors: **AASTUEN, David, J., W.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **BRUZZONE,**

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REFLECTIVE LCD PROJECTION SYSTEM USING WIDE-ANGLE CARTESIAN POLARIZING BEAM SPLITTER AND COLOR SEPARATION AND RECOMBINATION PRISMS

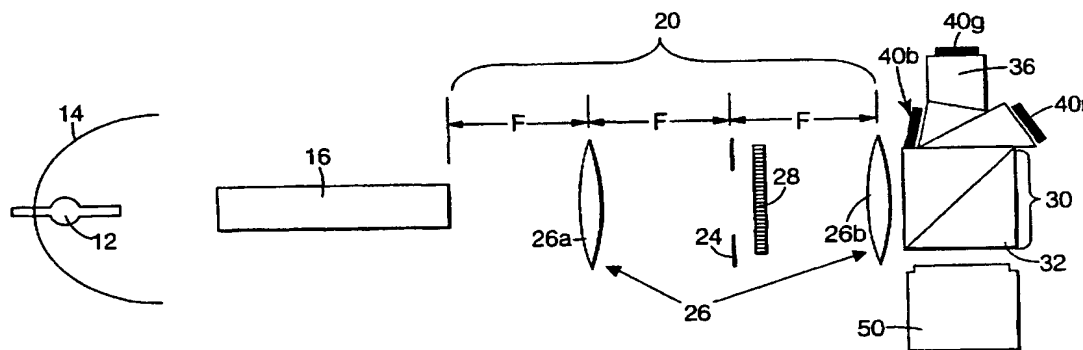

WO 01/55774 A3

(57) Abstract: An optical imaging system including an illumination system, a Cartesian PBS, and a prism assembly. The illumination system provides a beam of light, the illumination system having an $f/\#$ less than or equal to 2.5. The Cartesian polarizing beam-splitter has a first tilt axis, oriented to receive the beam of light. A first polarized beam of light having one polarization direction is folded by the Cartesian polarizing beam splitter and a second polarized beam of light having a second polarization direction is transmitted by the Cartesian polarizing beam splitter. The Cartesian polarizing beam splitter nominally polarizes the beam of light with respect to the Cartesian beam-splitter to yield the first polarized beam in the first polarization direction. The color separation and recombination prism is optically aligned to receive the first polarized beam. The prism has a second tilt axis, a plurality of color separating surfaces, and a plurality of exit surfaces. The second tilt axis may be oriented perpendicularly to the first tilt axis of the Cartesian polarizing beam-splitter so that the polarized beam is nominally polarization rotated into the second polarization direction with respect to the color separating surfaces and a respective beam of colored light exits through each of the exit surfaces. Each imager is placed at one of the exit surface of the color separating and recombining prism to receive one of the respective beams of colored light, wherein each imager can separately modulate the polarization state of the beam of colored light.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/02707

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N9/31

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 986 815 A (BRYARS BRETT) 16 November 1999 (1999-11-16) column 10, line 8 -column 12, line 57 column 17, line 51 -column 18, line 50 ---	1-24
P,X	US 6 157 420 A (NAKANISHI HIROSHI ET AL) 5 December 2000 (2000-12-05) column 8, line 25 -column 9, line 13 column 12, line 38 - line 45	13,15, 19-21, 23,24
X	& PATENT ABSTRACTS OF JAPAN vol. 1999, no. 01, 29 January 1999 (1999-01-29) & JP 10 274810 A (SHARP CORP), 13 October 1998 (1998-10-13)	13,15, 19-21, 23,24
A	abstract ----- -/-	1-12,14, 16,18,22

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

19 July 2001

Date of mailing of the international search report

26/07/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pigniez, T

INTERNATIONAL SEARCH REPORT

I. International Application No
PCT/US 01/02707

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 777 789 A (CHIU GEORGE LIANG-TAI ET AL) 7 July 1998 (1998-07-07) the whole document -----	1-24

INTERNATIONAL SEARCH REPORT

Information on patent family members

I. International Application No

PCT/US 01/02707

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5986815 A	16-11-1999	CN 1300379 T EP 1078298 A WO 9960439 A	20-06-2001 28-02-2001 25-11-1999
US 6157420 A	05-12-2000	JP 10274810 A	13-10-1998
US 5777789 A	07-07-1998	DE 69611561 D DE 69611561 T EP 0734183 A JP 8271854 A KR 241641 B	22-02-2001 21-06-2001 25-09-1996 18-10-1996 01-02-2000

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 August 2001 (02.08.2001)


PCT

(10) International Publication Number
WO 2001/055774 A3

- (51) International Patent Classification⁷: **H04N 9/31**
- (21) International Application Number:
PCT/US2001/002707
- (22) International Filing Date: 25 January 2001 (25.01.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/178,973 25 January 2000 (25.01.2000) US
09/746,933 22 December 2000 (22.12.2000) US
- (74) Agents: **BRADY, Arthur J.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (81) Designated State (*national*): JP.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published:
— with international search report
- (88) Date of publication of the international search report:
10 January 2002
- (71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (48) Date of publication of this corrected version:
1 April 2004
- (72) Inventors: **AASTUEN, David, J., W.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **BRUZZONE, Charles, L.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (15) Information about Corrections:
see PCT Gazette No. 14/2004 of 1 April 2004, Section II
Previous Correction:
see PCT Gazette No. 21/2002 of 23 May 2002, Section II

[Continued on next page]

(54) Title: REFLECTIVE LCD PROJECTION SYSTEM USING WIDE-ANGLE CARTESIAN POLARIZING BEAM SPLITTER AND COLOR SEPARATION AND RECOMBINATION PRISMS

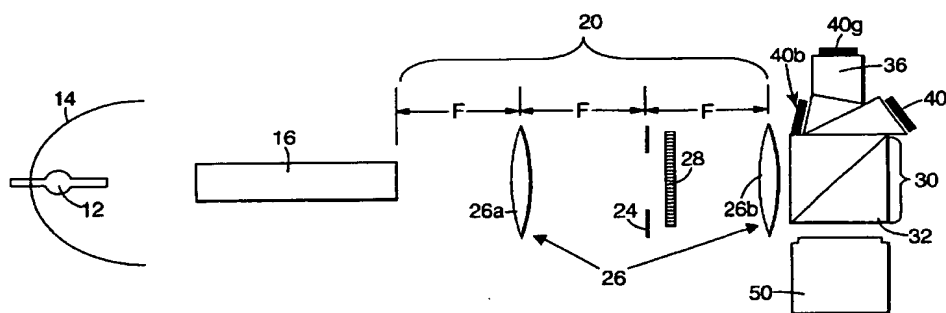

(57) Abstract: An optical imaging system including an illumination system, a Cartesian PBS, and a prism assembly. The illumination system provides a beam of light, the illumination system having an $f/\#$ less than or equal to 2.5. The Cartesian polarizing beam-splitter has a first tilt axis, oriented to receive the beam of light. A first polarized beam of light having one polarization direction is folded by the Cartesian polarizing beam splitter and a second polarized beam of light having a second polarization direction is transmitted by the Cartesian polarizing beam splitter. The Cartesian polarizing beam splitter nominally polarizes the beam of light with respect to the Cartesian beam-splitter to yield the first polarized beam in the first polarization direction. The color separation and recombination prism is optically aligned to receive the first polarized beam. The prism has a second tilt axis, a plurality of color separating surfaces, and a plurality of exit surfaces. The second tilt axis may be oriented perpendicularly to the first tilt axis of the Cartesian polarizing beam-splitter so that the polarized beam is nominally polarization rotated into the second polarization direction with respect to the color separating surfaces and a respective beam of colored light exits through each of the exit surfaces. Each imager is placed at one of the exit surface of the color separating and recombining prism to receive one of the respective beams of colored light, wherein each imager can separately modulate the polarization state of the beam of colored light.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)